
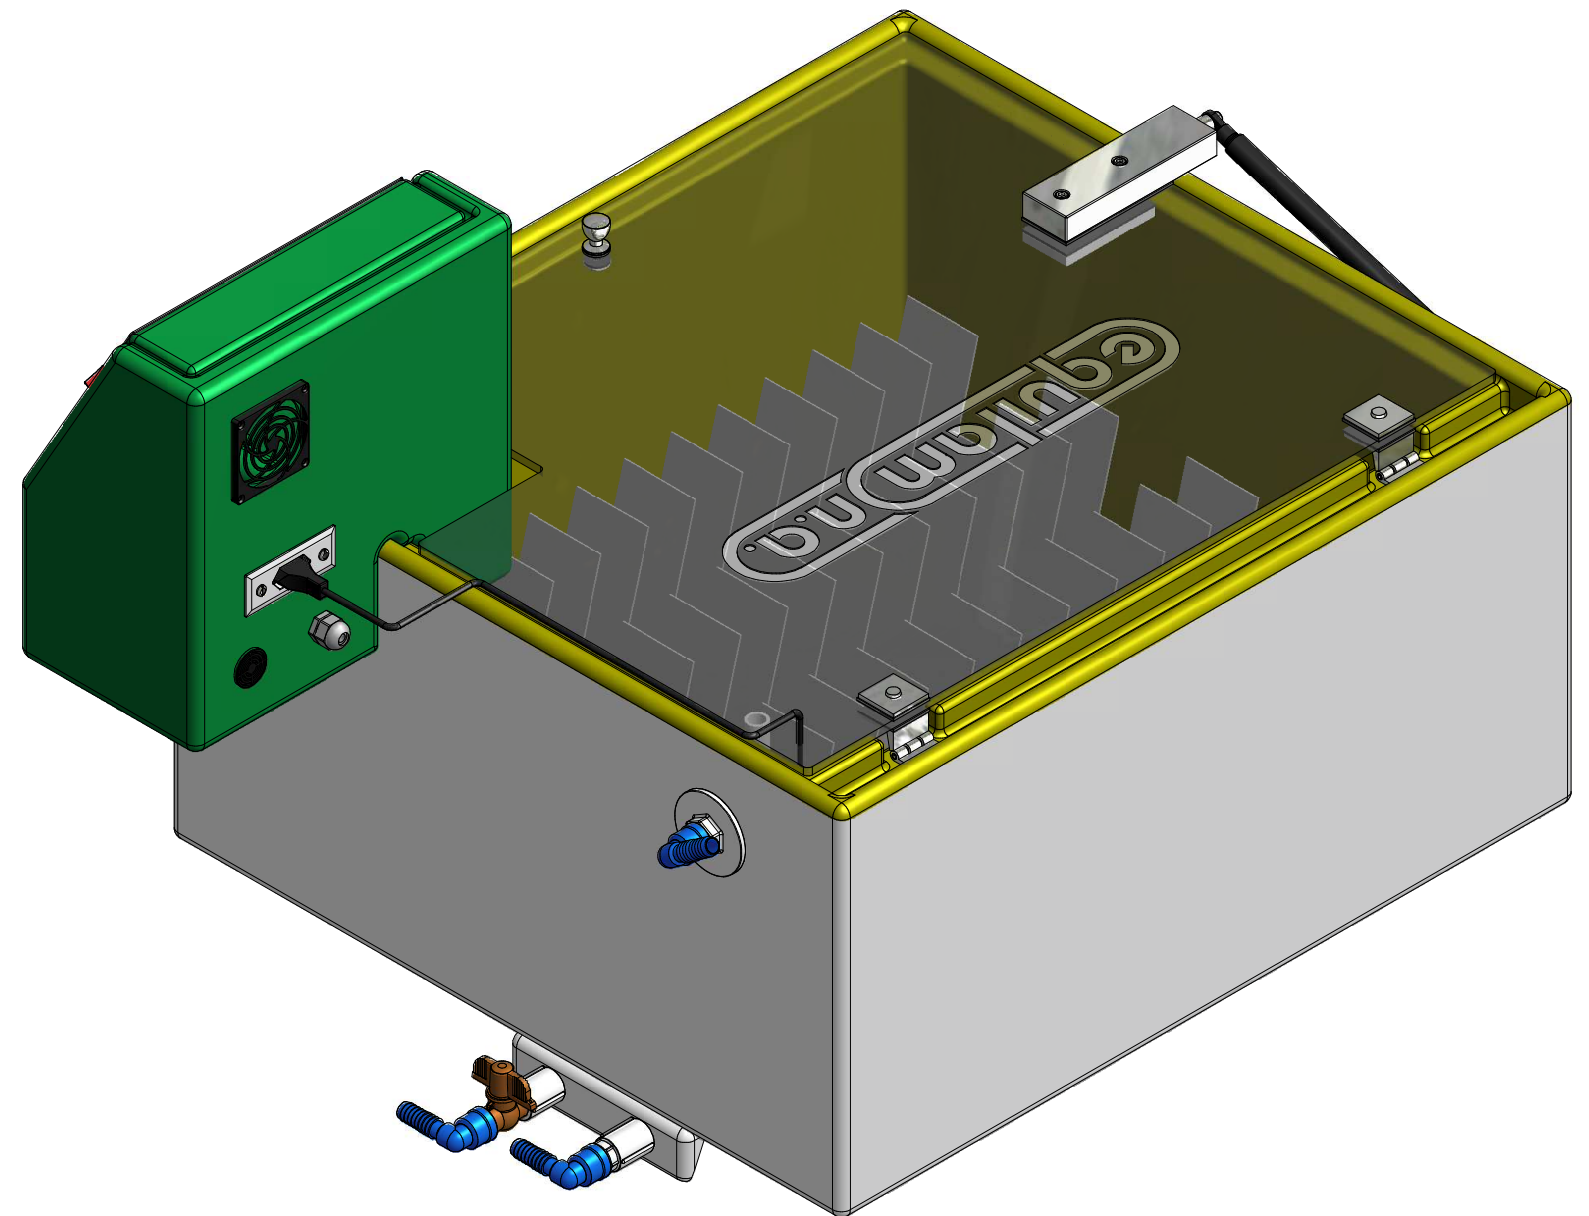


| Immersion Tank | |
|---|--|
| | IT-120 |
| Chamber Temperature Range | Amb. +9°F - +140°F (+5°C - +60°C) |
| Exterior Dimensions L x W x H: | 42.80" x 31.50" x 27.56" (1,087 mm x 800 mm x 700 mm) |
| Interior Dimensions L x W x H: | 29.33" x 25.00" x 13.58" (745mm x 635mm x 345mm) |
| Shipping Dimensions L x W x H: | 47.24" x 35" x 31" (1,200 mm x 900 mm x 800 mm) |
| Net Weight (Empty) | 154 lbs. (70 kg) |
| Gross Weight (w/ shipping package) | 330 lbs. (150 kg) |
| Work volume | 25.4 gal (96 L) W = 25.2" x D = 23.6" x H = 10" 640 mm x 600 mm x 250 mm |
| Ambient Temperature Requirements | +75°F - +82°F (+24°C - +28°C) |
| Ambient Humidity Requirements | max. 85% without condensation |
| Power | 208 ~ 230V - 50-60Hz - 1 phase |
| FLA (230V) | 16A |
| Water Quality | ASTM D 1193 Type IV |
| Water Supply | 7 to 14 psi (0.5 to 1.0 kgf/cm ²) |
| Water Connection | 1/2" hose barb fitting |
| Water Usage | 1.32 gal per day (5 liters) |
| Gravity Drains | 1/2" hose barb fitting |

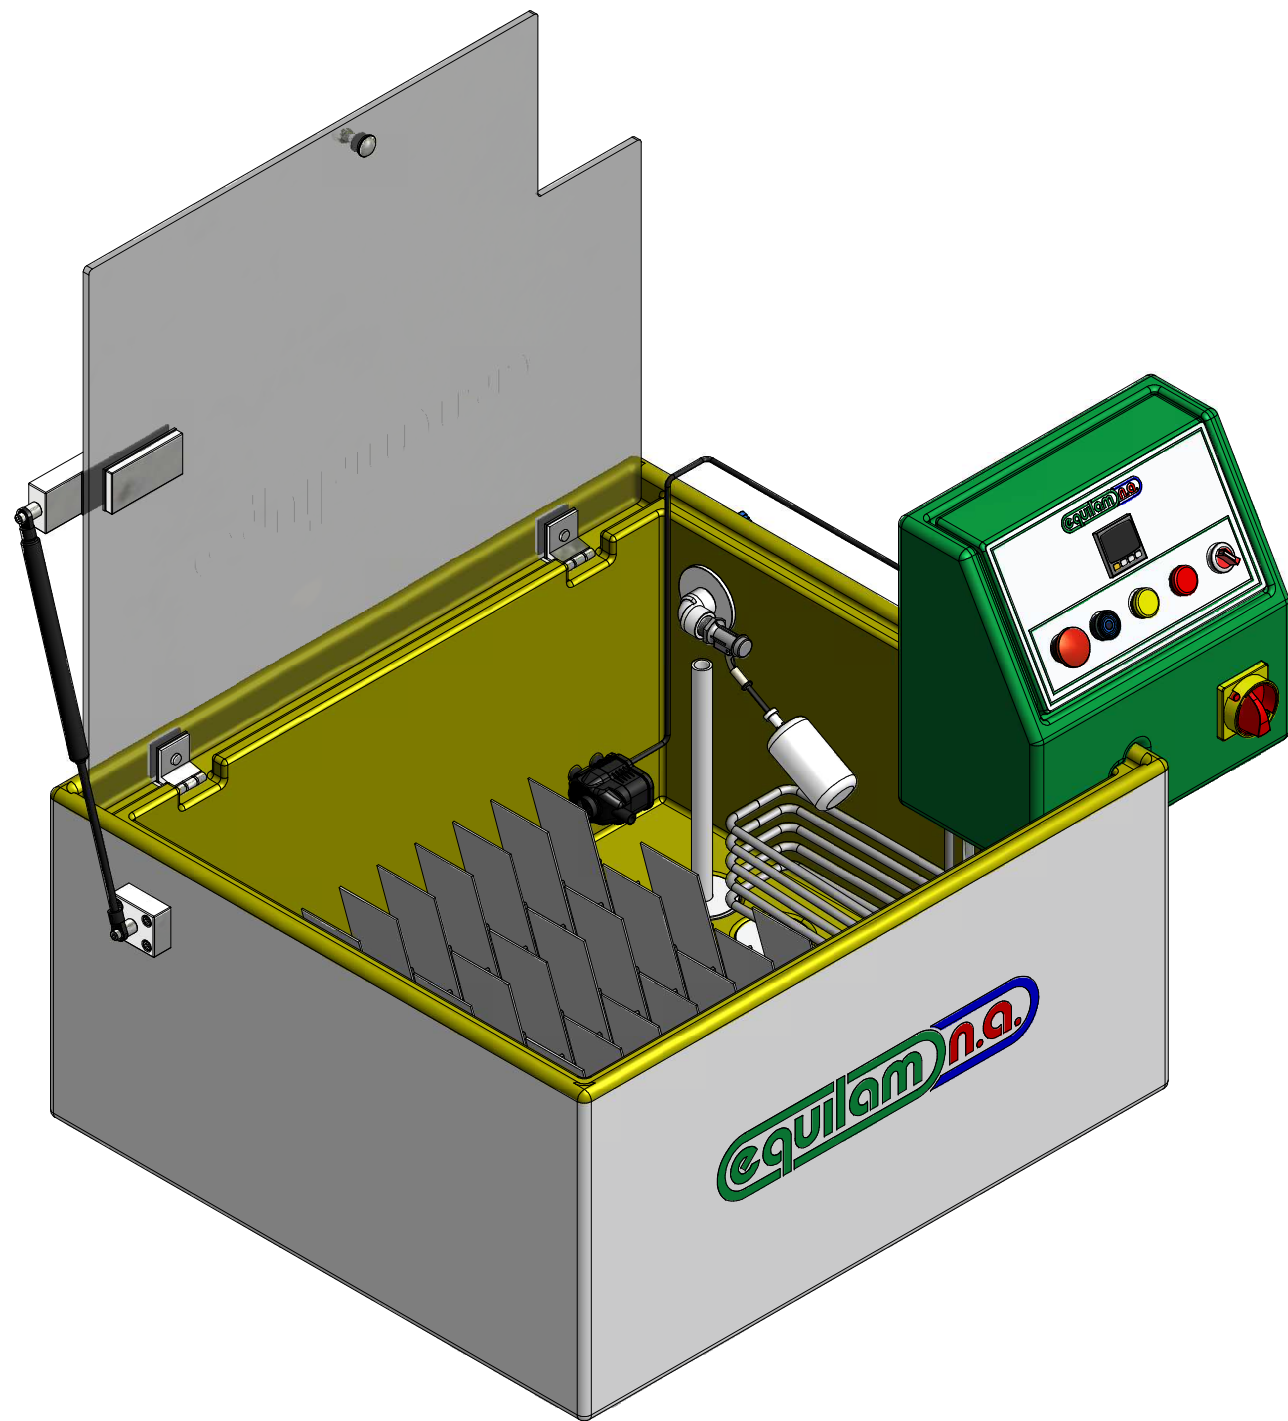

Date:
05/19/2016

Sheet:
A3

No.

www.equilamna.com

Description: Specification Sheet

Project: Immersion Tank

Rev.00